


# Alligator<sup>®</sup> Rivet Fastening System

AR200A

Alligator<sup>®</sup> Rivet is a strong, easy-to-install splice for round hay baler applications.

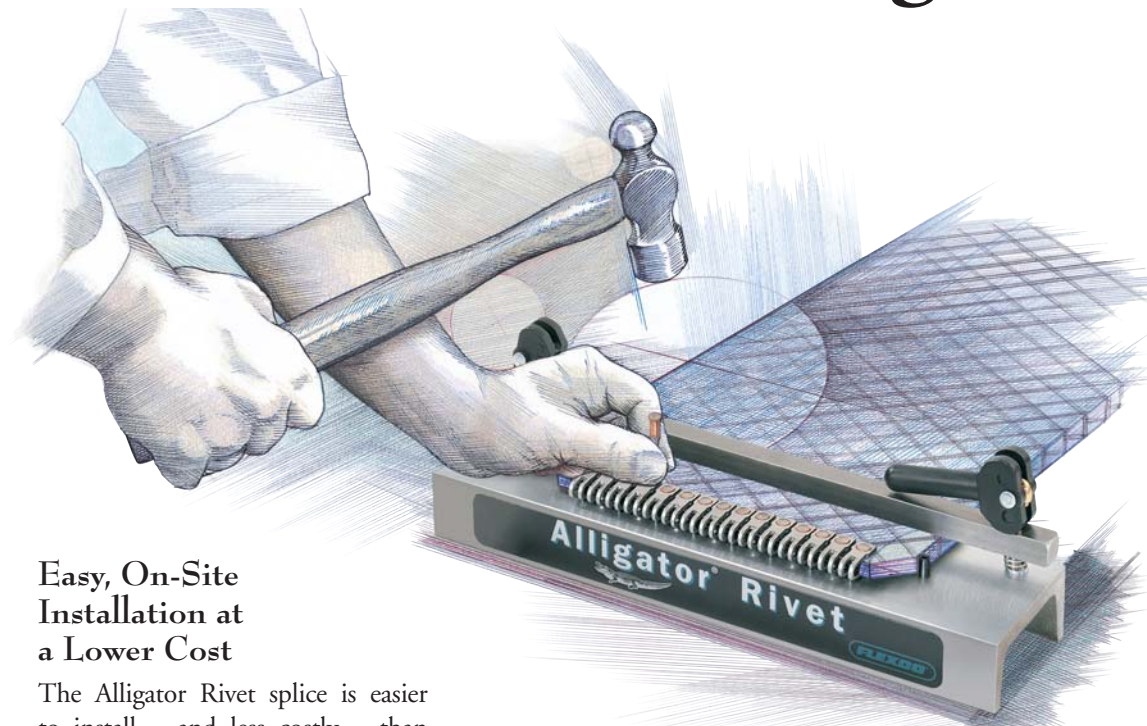

## Easy, On-Site Installation at a Lower Cost

The Alligator Rivet splice is easier to install – and less costly – than other competitive brands. And, without ever removing the belts from the baler, field installation is quick and easy with only the portable application tool and a 1 lb. hammer.

## High Strength and Longer Life


Rugged, stainless steel design is abrasion- and corrosion-resistant and has a long life for severe, heavy-duty applications.

Fasteners are available in 4", 6", 7", 10" and 14" (100 mm, 150 mm, 175 mm, 250 mm and 350 mm) pre-cut lengths, and can be cut to shorter lengths.

Self-setting rivets accommodate belts 1/8" to 7/32" (3.2 mm to 5.6 mm) thick and 3-1/2" (88 mm) minimum pulley diameters. They can be applied to all types of baler belting, including used belts.

The connecting pin is designed for long life. It is a large diameter (.140" or 3.6 mm) hardened spring, stainless steel material.

# Alligator<sup>®</sup> Rivet

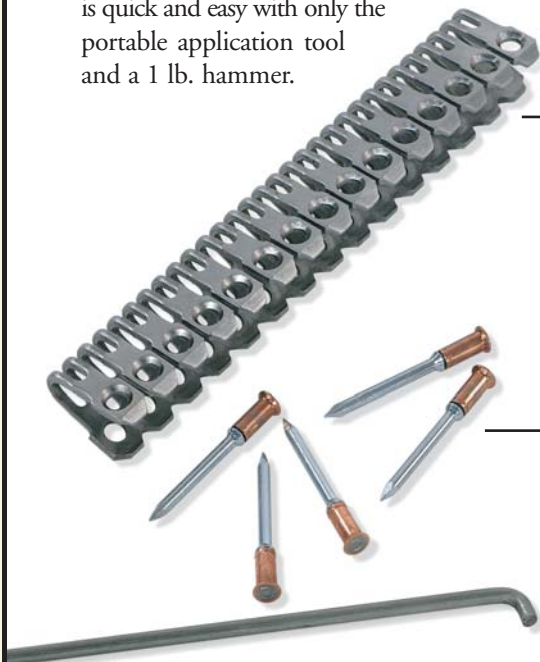

## Alligator® Rivet Fastening System

Alligator® Rivet offers easy installation and low cost – without sacrificing reliability and long life. These advantages improve baler performance, bottom-line costs and overall productivity.

Fasteners, rivets, and connecting pins are made of strong, abrasion-resistant stainless steel. Additionally, the fastener's leading edge has a low profile to minimize snagging and wear on other components, such as rollers. Alligator Rivet is also compatible with net wrap balers.




### Fasteners

Belt Width		Ordering Number
in.	mm.	
4	100	ARJ4/100
6	150	ARJ6/150
7	175	ARJ7/175
10	250	ARJ10/250
14	350	ARJ14/350

**Note:** Each package includes fasteners, rivets and hinge pins for 2 complete splices.

### Portable Hand Applicator Tool

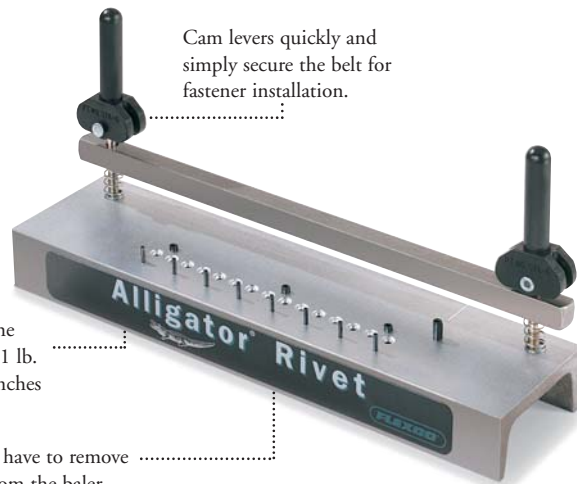

Cam levers quickly and simply secure the belt for fastener installation.

For field installation, all that's required is the applicator tool and a 1 lb. hammer – special punches are not required.

You never have to remove the belt from the baler.

### Replacement Hinge Pins & Rivets

Description	Ordering Number	
	300 Series Stainless Spring Wire	Steel Corrugated
4" (100 mm) Hinge Pin - 9/Pkg.	ARSS1-4/100	ARSH4/100
6" (150 mm) Hinge Pin - 8/Pkg.	ARSS1-6/150	ARSH6/150
7" (175 mm) Hinge Pin - 6/Pkg.	ARSS1-7/175	ARSH7/175
10" (250 mm) Hinge Pin - 4/Pkg.	ARSS1-10/250	ARSH10/250
14" (350 mm) Hinge Pin - 4/Pkg.	ARSS1-14/350	ARSH14/350
Extra Rivets - 15/Pkg.	AR3-15	

### Hand Applicator Tools & Tool Kits

Description	Ordering Number
7" (175 mm) Installation Tool	ART-7
14" (350 mm) Installation Tool	ART-14
7" (175 mm) Installation Kit	ARTK-7
14" (350 mm) Installation Kit	ARTK-14

**Note:** Each kit includes Installation Tool, Belt Hand Skiver, 1 lb. hammer, Pin Bender, and 2 packages of Alligator Rivet, packaged in durable plastic tool box.



Flexible Steel Lacing Company  
2525 Wisconsin Avenue  
Downers Grove, IL 60515-4200 U.S.A.  
Telephone: (630) 971-0150  
Fax: (630) 971-1180  
E-mail: advertising@flexco.com  
Visit our Web site at: www.flexco.com

Australia: 61-2-9680-3322 • England: 44-1457-891000 • Germany: 49-7428-9406-0 • Mexico: 52-5-674-5326  
New Zealand: 64-9-415-4488 • Republic of South Africa: 27-11-974-2771

