


For Clean, Simple Cuts in Either Direction: Belt Cutters from Flexco



840 Series Cutter for belts from 3/8" (10 mm) to 1" (25 mm).

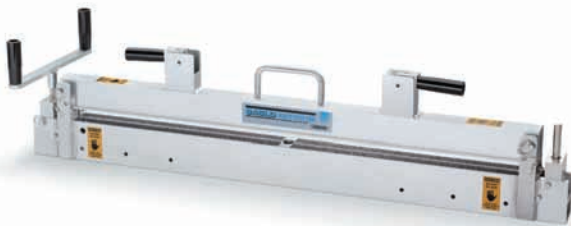

Clipper® 845LD Cutter for belts up to 1/2" (12 mm).



Alligator® 300 Series Cutter for belts up to 1-9/16" (39 mm).

840 and Clipper® 845LD Series Belt Cutters

Select an easy-to-use belt cutter ideally sized to the thickness and width of your belt. Both the 840 Series Belt Cutter (for belts from 3/8" [10 mm] to 1" [25 mm]) and the Clipper® 845LD Belt Cutter (for belts up to 1/2" [12 mm]) feature a special flat-top blade design for added safety. Plus, both can be chain-driven from either end of the cutter to simplify clean cuts in both directions.

Removable clamp bars hold belts securely and can be hinged and lifted from either end to simplify routine operation and maintenance. And both cutters feature a chain tensioner for fast field adjustment, and a specially designed drive wrench that also adjusts chain tensioner bolts.

Alligator® 300 Series Belt Cutter

For belts up to 1-1/8" (28 mm) thick, the Alligator® 300 Series belt cutter features a double-edged blade that cuts cleanly in either direction. Also available with an extra-long blade for belts up to 1-9/16" (39 mm) thick.

Flexco

Belt Cutters from Flexco

840 Series Belt Cutter

Belt widths up to:		Description	Ordering Number
in.	mm		
36	900	36" Belt Cutter	840836
48	1200	48" Belt Cutter	840848
60	1500	60" Belt Cutter	840860
72	1800	72" Belt Cutter	840872
84	2100	84" Belt Cutter	840884
Replacement Parts			
Wrench Assembly (handle)			840WA
Extra Blade (with screw) 1" (25 mm)			840-1CB
Optional Squaring Device			840SD




Aluminum Content

Aluminum Alloy Type	Percent	
	Mg Magnesium	Ti Titanium
6061	1.00%	0%

Clipper® 845LD Belt Cutter

Belt widths up to:		Description	Ordering Number
in.	mm		
36	900	36" Belt Cutter	845836LD
48	1200	48" Belt Cutter	845848LD
60	1500	60" Belt Cutter	845860LD
72	1800	72" Belt Cutter	845872LD
Replacement Parts			
Wrench Assembly (handle)			840WA
Cutter Blade Kit			845-CBK
Optional Squaring Device			840SD

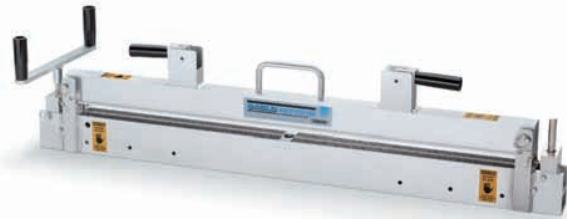

Aluminum Content

Aluminum Alloy Type	Percent	
	Mg Magnesium	Ti Titanium
6061	1.00%	0%

Alligator® 300 Series Belt Cutter

Cutter Complete

Belt Width		Ordering Number
in.	mm	
12	300	300312
18	450	300318
24	600	300324
30	750	300330
36	900	300336
42	1050	300342
48	1200	300348
60	1500	300360



Aluminum Content

Aluminum Alloy Type	Percent	
	Mg Magnesium	Ti Titanium
380	0.10%	0%



Flexible Steel Lacing Company
 2525 Wisconsin Avenue
 Downers Grove, IL 60515-4200 U.S.A.
 Telephone: (630) 971-0150
 Fax: (630) 971-1180
 E-mail: advertising@flexco.com
 Visit our Web site at: www.flexco.com

Australia: 61-2-9680-3322 • England: 44-1274-600-942 • Germany: 49-7428-9406-0
 Mexico: 52-55-5674-5326 • South Africa: 27-11-608-4180

© 2007 Flexible Steel Lacing Company. 7/01, Part#X0756
 Alligator® and Clipper® are registered trademarks of Flexible Steel Lacing Company.

