


EZS2 Rockline® Secondary Cleaner


The Economical, Efficient Belt Cleaning Solution

The EZS2 Secondary Belt Cleaner improves belt cleaning efficiency and reduces routine maintenance tasks. And it does all of this at an affordable price. Add easy, do-it-yourself installation and it makes an unbeatable solution for your conveyor belt cleaning needs.

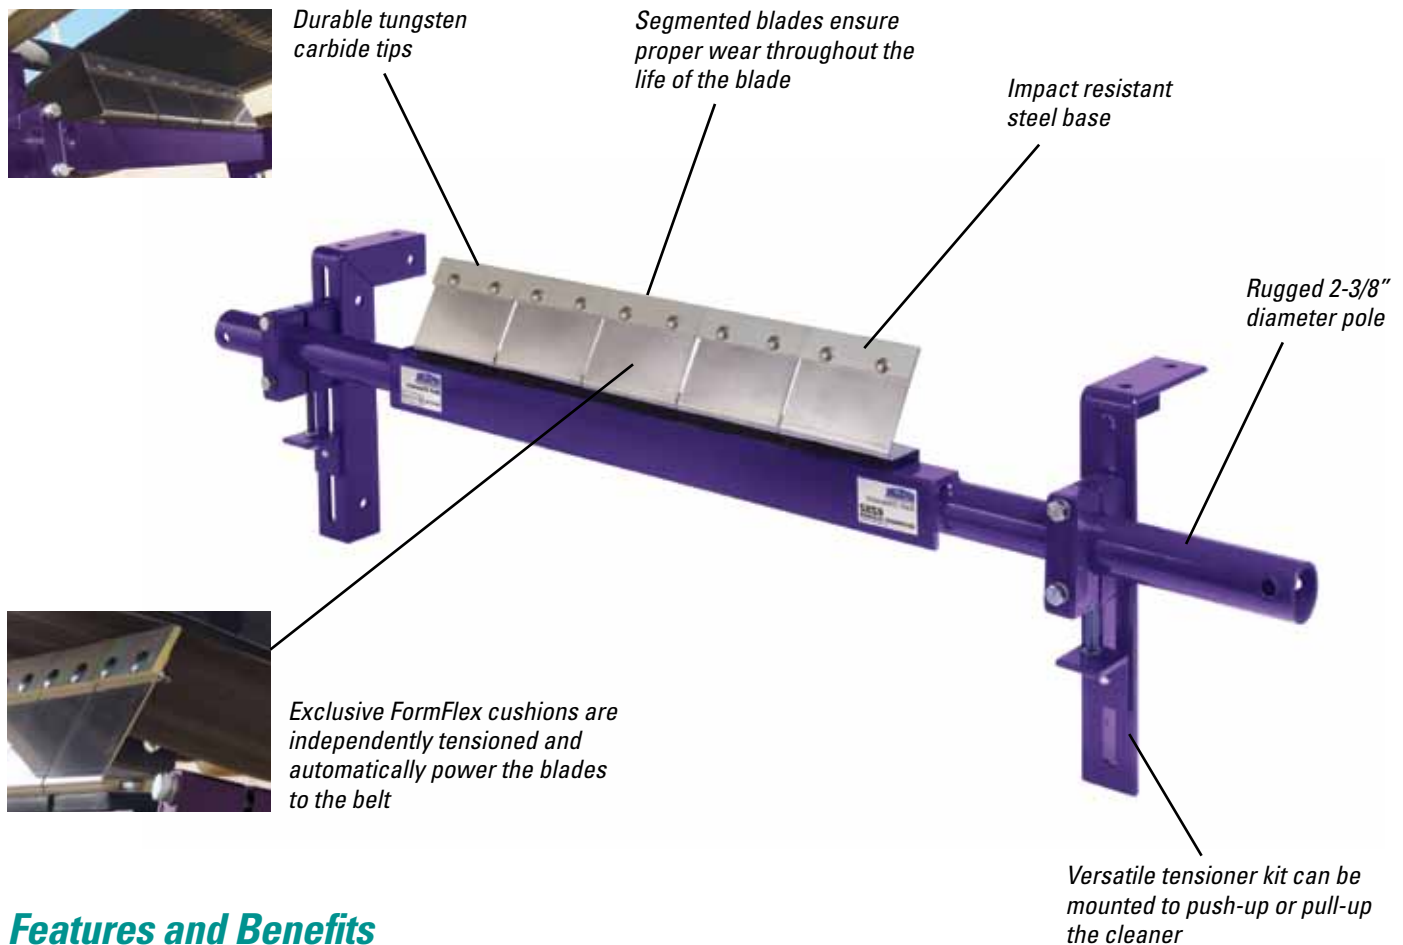

Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The tungsten carbide-tipped blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption.
- **A complete cleaning system.** When the EZS2 is teamed with the EZP1 Precleaner, the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 18" to 72" (450 mm to 1800 mm).



EZS2 Rockline® Secondary Cleaner

Specifications and Guidelines

Maximum Belt Speed

700 FPM (3.5 M/sec)

Temperature Rating


-30° F to 200° F (-35° C to 93° C)

Usable Blade Wear Length

3/8" (9 mm)

Available for Belt Widths

18" to 72" (450 to 1800 mm)

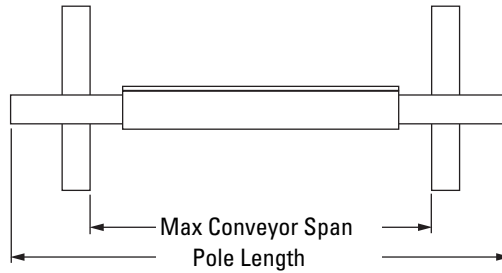

Pole Length

Blade width + 34"
(850 mm)

Maximum

Conveyor Span


Blade width + 29"
(725 mm)

Ordering Information

EZS2 Secondary			
Belt Width		Ordering Number	Item Code
in.	mm		
18	450	EZS2-18	75643
24	600	EZS2-24	75644
30	750	EZS2-30	75645
36	900	EZS2-36	75646
42	1050	EZS2-42	75647
48	1200	EZS2-48	75648
54	1350	EZS2-54	75649
60	1500	EZS2-60	75650
72	1800	EZS2-72	75651

Replacement C-Tips	
Ordering Number	Item Code
ICT6	74535

Tips Required Per Cleaner Size										
in.	18	24	30	36	42	48	54	60	72	
mm	450	600	750	900	1050	1200	1350	1500	1800	
C-Tips Required	3	4	5	6	7	8	9	10	12	

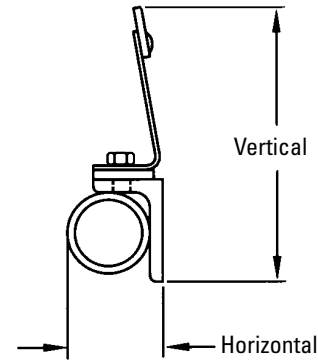

Horizontal Clearance Required

4" (100 mm)

Vertical Clearance Required

8-1/2" – 9-1/2"
(213 – 238 mm)

Additional Information

For high temperature applications up to 400° F (204° C), see the High Temp EZS2 Sell Sheet.



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 U.S.A.
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com • Web: www.flexco.com

Australia: 61-2-9680-3322 • China: 86-21-33528388 • England: 44-1274-600-942 • Germany: 49-7428-9406-0
India: 91-44-4354-2091 • Mexico: 52-55-5674-5326 • Singapore: 65-6281-7278 • South Africa: 27-11-608-4180

©2011 Flexible Steel Lacing Company. Rockline® is a registered trademark. 05/11. For Reorder: X2396

Authorized Distributor:

